


AquaLink® RS OneTouch™ Quick Review Card

Basic Operation: The AquaLink® RS OneTouch™ Indoor Control panel can turn your pool/spa/landscape equipment on and off three ways: **First-** you can manually activate the equipment you want to turn on through the EQUIPMENT ON/OFF menu.

Second- you can also program the equipment to turn on and off at specific times. See page 4 for a detailed explanation of how to program equipment for automatic operation.

Third- you can use preset values that reside in the OneTouch Menu which allows you to create scene settings with just "one touch" of a button. For example, spa heater @ 101°, spa light on, jets activated, and water features on and name it Romantic Scene.

Note: the AquaLink® RS OneTouch™ has two default screens; date/time/temp screen or the OneTouch quick operation screen. The OneTouch will return to the last screen used after a 30 second delay.

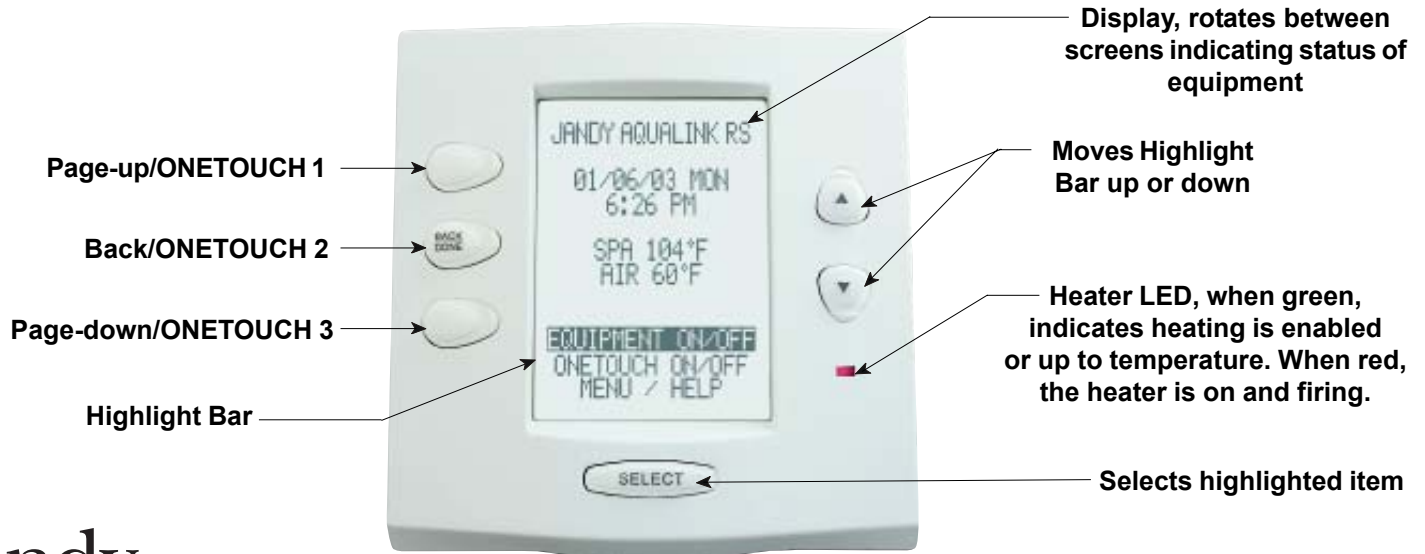

Sheet # 8150 Rev. A

6000 Condor Drive, Moorpark, CA, USA 93021 • 707.776.8200 FAX 707.763.7785
480 S. Service Road West, Oakville, Ontario, Canada L6K 2H4 • 905.844.8233 FAX 905.844.2635
For Technical Support call 707.776.8200 Litho in U.S.A. © Water Pik Technologies, Inc. 1002

AquaLink® RS OneTouch™ Programming & System Defaults

Basic Operation: After powering up the AquaLink RS OneTouch Indoor Control panel, the first screen you will see will be the Date & Time Menu. From this main screen you will be able to program the system to your specifications. Use the buttons as explained in the diagram below. To review button operation, select MENU/HELP, HELP, then KEYS. When moving through the screens, you will have about 15 seconds before the controller will return to the previous menu.

Equipment On/Off: From Date & Time screen, highlight EQUIPMENT ON/OFF and press select. To highlight an item, use the up or down buttons. Use the SELECT button to turn the equipment on or off. After turning a piece of equipment on, return to the main menu by using the back button.

Set the Time: To SET TIME, highlight MENU/HELP press select, highlight SET TIME and press select. Use up and down arrows and select button to set time.

Label Auxiliary Functions: To LABEL AUX, highlight MENU/HELP press select, highlight SYSTEM SETUP press select, highlight LABEL AUX, press select. Highlight an AUX and press select. You can choose a name from general, light or waterfall labels or select a custom label and use the arrow keys to change letters. Use select to move to the next letter.

Set the Temperature: To SET TEMP, highlight MENU/HELP press select, highlight SET TEMP and press select. Inside the SET TEMP menu, use the arrow keys to highlight either pool or spa and press select. Use the arrow keys to increase or decrease the temperature.

Set Spa (Four Function) Switch: To setup SPA SWITCH buttons, highlight MENU/HELP press select, highlight SYSTEM SETUP press select, highlight SPA SWITCH and press select. Inside the SPA SWITCH menu, highlight the number of Spa Side Switches you have and press select. Use the arrow keys to move the highlight bar to choose which button you are assigning, press select. Use the arrow keys to move the highlight bar to choose which piece of equipment will be associated with the button, press select. After pressing select on the piece of equipment, you will be returned one screen to continue assigning Spa Side Switch buttons.

Set SpaLink® RS: To setup SPALINK buttons, highlight MENU/HELP press select, highlight SYSTEM SETUP press select, highlight SPALINK press select. Inside the SPALINK menu, highlight the number of SpaLink(s) you have and push select. Use the arrow keys to move the highlight bar to choose what button number goes with what equipment, push select. Use the arrow keys to move the highlight bar to choose which piece of equipment will be associated with the button, push select. After pushing select on the piece of equipment, you will be returned one screen to continue assigning SpaLink RS buttons.

Set Freeze Protection: To activate FREEZE PROTECT, highlight MENU/HELP press select, highlight SYSTEM SETUP press select, highlight FREEZE PROTECT press select. Use the arrows keys to change temperature. Once the temperature is set, use the select button to move to the next screen to assign freeze protection to a selected piece of equipment. **NOTE:** the filter pump is always assigned to freeze protection. Use back button to return to main menu.

Default Time

Default Time - 1:00 PM
Month 1 Hour 1 MIN 0
Default Day - 01/31/98

Default Temperature

Default Pool Temp. - 80°F
Default Spa Temp. - 104°F

Default Freeze Protect Settings

Filter Pump: Freeze Protection ON.
All other Equipment: Freeze Protection OFF.
NOTE: If you selected Spa to be freeze protected, water circulation will switch between pool and spa every 30 minutes during freezing conditions once freeze mode is active.